

CINEMA Hybrid Flex LED Mat/Panels

2835 Hybrid Series



Cuttable Flex LED Mat/Panel CINEMA Hybrid Series

2835 Hybrid Series 


Cuttable Flex LED Mat/Panel CINEMA Hybrid Series.

For the CINEMA series use tungsten/flame combined with daylight sources CCT from 2000K with 10000K and among, high CRI 95+, with full spectrum R1-R15 all above 90, all TLCI>95.


With your professional high frequency controller or DMX decoder supplied from GLU Lighting, it can achieve all CCT between.

Cuttable with DC12V, DC24V and different density for choice, with 120 degree view angle allows for soft, even output even at close distances. Extremely versatile, light-weight, color-correct, and economical make all these LED Mat a hit with cinematographers and DOPs alike.


CINEMA TUNGSTEN COLOR RENDERING INDEX CCT 2766K Ra=97.3

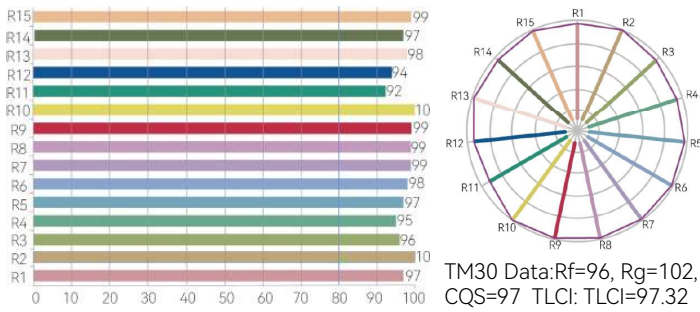


CINEMA DAYLIGHT COLOR RENDERING INDEX CCT 5646K Ra=98.3

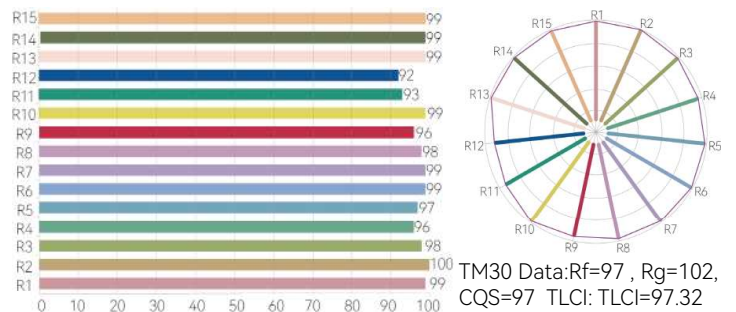


CINEMA TUNGSTEN COLOR SPECTRUM & WAVELENGTH

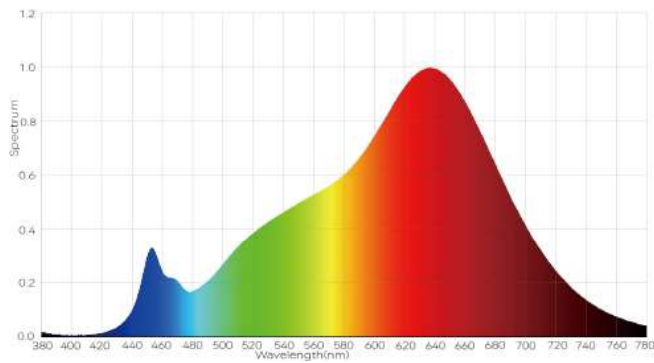


CINEMA DAYLIGHT COLOR SPECTRUM & WAVELENGTH

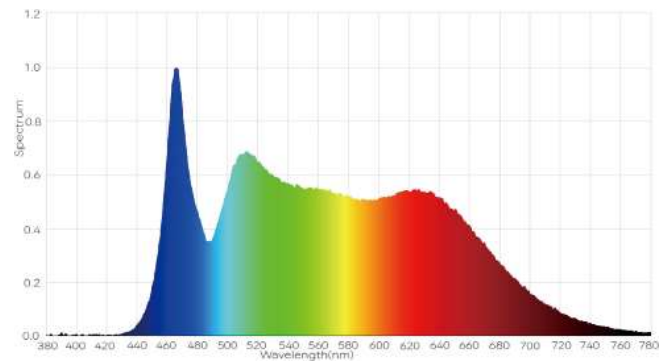


CINEMA DAYLIGHT COLOR RENDERING INDEX CCT 6500K Ra=97.2

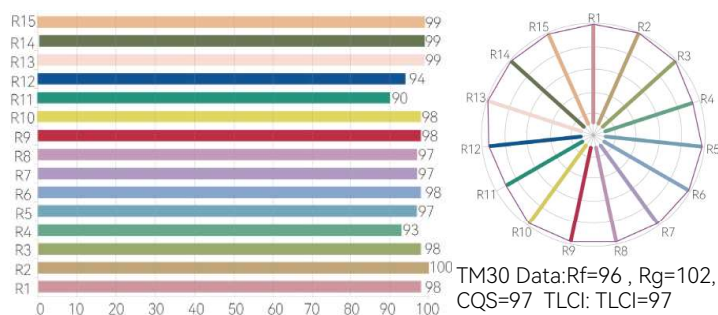


CINEMA DAYLIGHT COLOR RENDERING INDEX CCT 10579K Ra=95.9

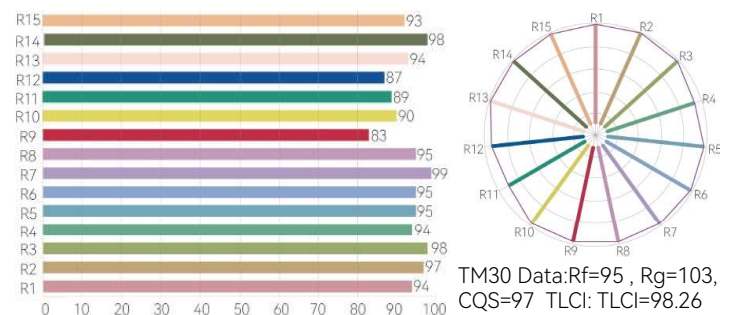

CINEMA DAYLIGHT COLOR SPECTRUM & WAVELENGTH

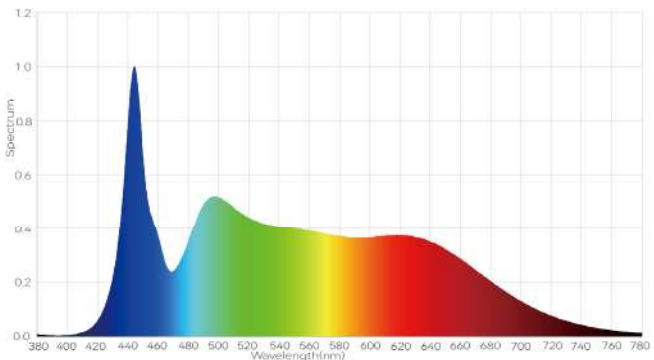

CINEMA DAYLIGHT COLOR SPECTRUM & WAVELENGTH

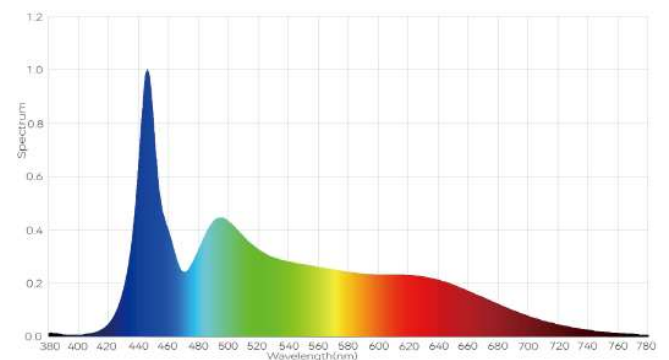


Cuttable Flex LED Mat/Panel CINEMA Hybrid Series

2835 Hybrid Series 格路光电 GLULighting



Cuttable Flex Mat, 288LEDs, DC12V

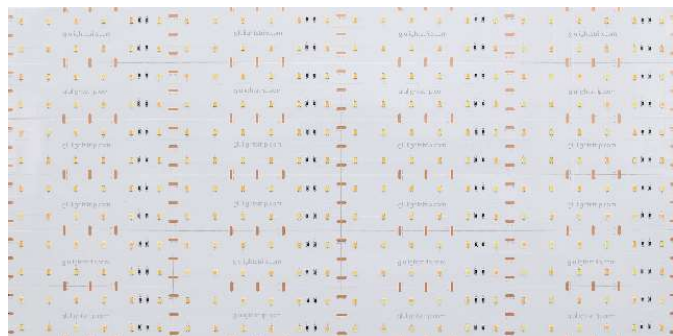

Part No.: GLU-P2L0300BI288-12V

LED Qty.: 288pcs(Tungsten/Daylight each 144 pcs)

Working Voltage: DC12V

Power: 50W(Max.)

Current: 4.17A(Max.)

Beam Angle: 120°

Dimension: 480×240mm(18.9×9.45 in.)

Mini Cuttable Size: 120×40mm(4.72×1.57in.)

Operating Temperature: -20° C to +50° C

IP Grade: IP20

Connector: Bare cable, Phoenix 3-Female, RXL Connector

Life Span:50,000 Hrs

Certification: UL/CUL Listed(Pending), CE Compliant



CINEMA Hybrid, DC12V

CCT: 2000K-3200K(Tungsten)/5600K-10000K(Daylight)

Typic CCT: 2800K(Tungsten)/6500K(Daylight)

CRI: 95+(Tungsten)/95+(Daylight)


TLCI: 95+(Tungsten)/95+(Daylight)

TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)


Lumens: 2050(Tungsten)/2200(Daylight)

Dimension

Cuttable Flex Mat, 288LEDs, DC12V

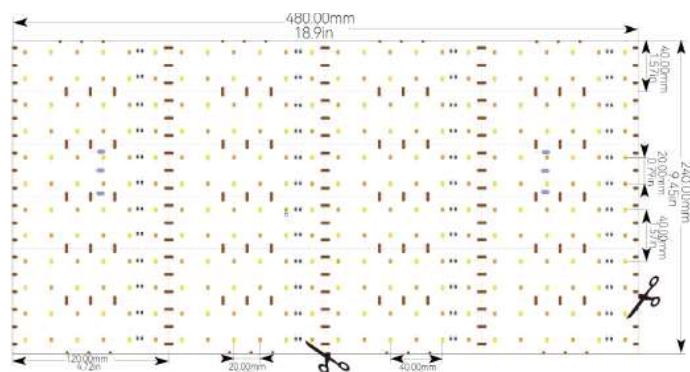

Cuttable Flex Mat, 288LEDs, DC24V

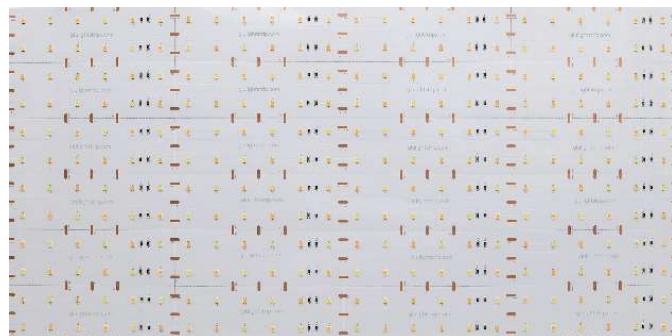

Part No.: GLU-P2L0300BI288-24V

LED Qty.: 288pcs(Tungsten/Daylight each 144 pcs)

Working Voltage: DC24V

Power: 50W(Max.)

Current: 2.08A(Max.)

Beam Angle: 120°

Dimension: 480×240mm(18.9×9.45 in.)

Mini Cuttable Size: 120×40mm(4.72×1.57in.)

Operating Temperature: -20° C to +50° C

IP Grade: IP20

Connector: Bare cable, Phoenix 3-Female, RXL Connector

Life Span:50,000 Hrs

Certification: UL/CUL Listed, CE Compliant



CINEMA Hybrid, DC24V

CCT: 2000K-3200K(Tungsten)/5600K-10000K(Daylight)

Typic CCT: 2800K(Tungsten)/6500K(Daylight)

CRI Whites: 95+(Tungsten)/95+(Daylight)


TLCI Whites: 95+(Tungsten)/95+(Daylight)

TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)

Lumens: 2080(Tungsten)/2220(Daylight)

Dimension

Cuttable Flex Mat, 288LEDs, DC24V

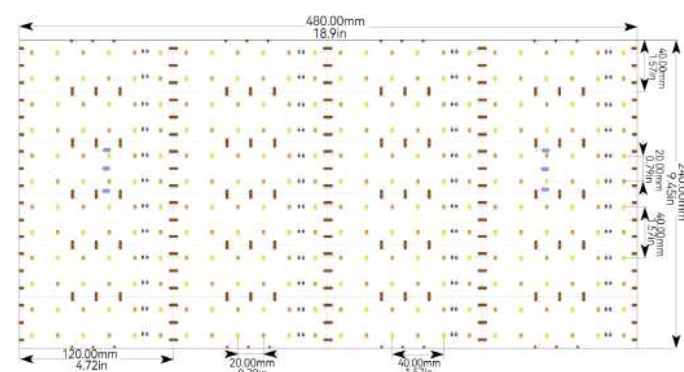


Cuttable Flex LED Mat/Panel CINEMA Hybrid Series

2835 Hybrid Series 格路光电 GLU Lighting



Cuttable Flex Mat, 392LEDs, DC24V

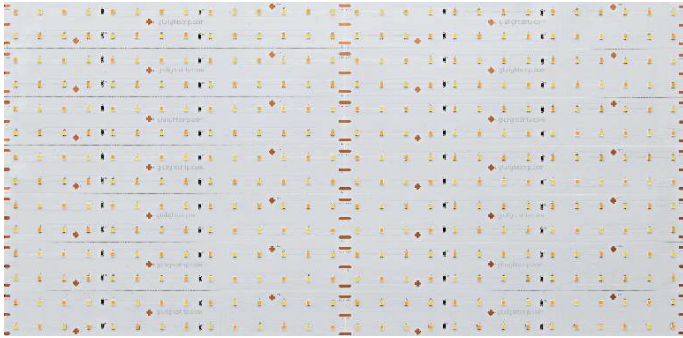

Part No.: GLU-P2L0300BI392-24V

LED Qty.:392pcs(Tungsten/Daylight each 196 pcs)

Working Voltage: DC24V

Power: 60W(Max.)

Current: 2.5A(Max.)

Beam Angle: 120°

Dimension: 480×240mm(18.9×9.45 in.)

Mini Cuttable Size: 240×34.28mm(9.45×1.35in.)

Operating Temperature: -20° C to +50° C

IP Grade: IP20

Connector: Bare cable, Phoenix 3-Female, RXL Connector

Life Span:50,000 Hrs

Certification: UL/CUL Listed, CE Compliant



CINEMA Hybrid, DC24V

CCT: 2000K-3200K(Tungsten)/5600K-10000K(Daylight)

Typic CCT: 2800K(Tungsten)/6500K(Daylight)

CRI: 95+(Tungsten)/95+(Daylight)


TLCI: 95+(Tungsten)/95+(Daylight)

TM-30 Data: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)

Lumens: 2750(Tungsten)/3000(Daylight)

Dimension

Cuttable Flex Mat, 392LEDs, DC24V

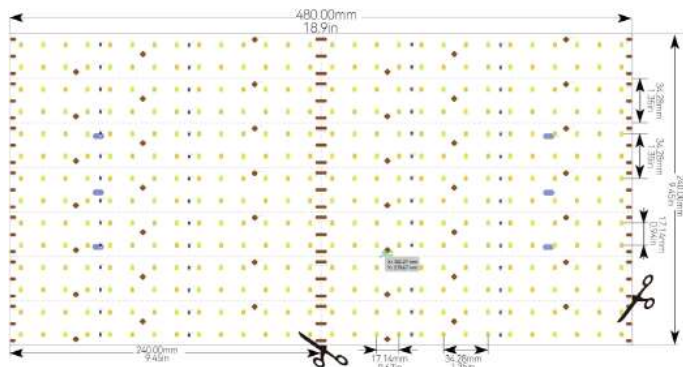

Cuttable Flex Mat, 480LEDs, DC12V



Part No.: GLU-P2L0300BI480-12V

LED Qty.: 480pcs(Tungsten/Daylight each 240 pcs)

Working Voltage: DC12V

Power: 80W(Max.)

Current: 6.67A(Max.)

Beam Angle: 120°

Dimension: 480×240mm(18.9×9.45 in.)

Mini Cuttable Size: 96×30mm(3.78×1.18in.)

Operating Temperature: -20° C to +50° C

IP Grade: IP20

Connector: Bare cable, Phoenix 3-Female, RXL Connector

Life Span:50,000 Hrs

Certification: UL/CUL Listed(Pending), CE Compliant



CINEMA Hybrid, DC12V

CCT: 2000K-3200K(Tungsten)/5600K-10000K(Daylight)

Typic CCT: 2800K(Tungsten)/6500K(Daylight)

CRI: 95+(Tungsten)/95+(Daylight)


TLCI: 95+(Tungsten)/95+(Daylight)

TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)

Lumens: 3200(Tungsten)/3400(Daylight)

Dimension

Cuttable Flex Mat, 480LEDs, DC12V

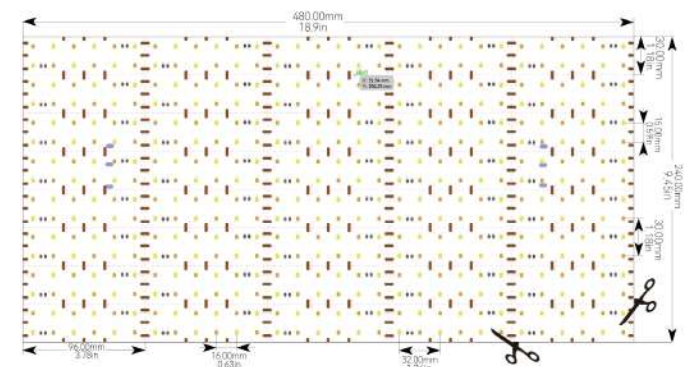

Cuttable Flex LED Mat/Panel CINEMA Hybrid Series

2835 Hybrid Series 格路光电 GLULighting

Cuttable Flex Mat, 480LEDs, DC24V



Part No.: GLU-P2L0300BI480-24V

LED Qty.: 480pcs(Tungsten/Daylight each 196 pcs)

Working Voltage: DC24V

Power: 80W(Max.)

Current: 3.33A(Max.)

Beam Angle: 120°

Dimension: 480×240mm(18.9×9.45 in.)

Mini Cuttable Size: 96×30mm(3.78×1.18in.)

Operating Temperature: -20° C to +50° C

IP Grade: IP20

Connector: Bare cable, Phoenix 3-Female, RXL Connector

Life Span: 50,000 Hrs

Certification: UL/CUL Listed, CE Compliant

24VDC CINEMA Hybrid, DC24V

CCT: 2000K-3200K(Tungsten)/5600K-10000K(Daylight)

Typic CCT: 2800K(Tungsten)/6500K(Daylight)

CRI: 95+(Tungsten)/95+(Daylight)


TLCI: 95+(Tungsten)/95+(Daylight)

TM-30 Data: Rf>95, Rg>102, CQS>97(Tungsten/Daylight)

Lumens: 3230(Tungsten)/3460(Daylight)

Dimension

Cuttable Flex Mat, 480LEDs, DC24V

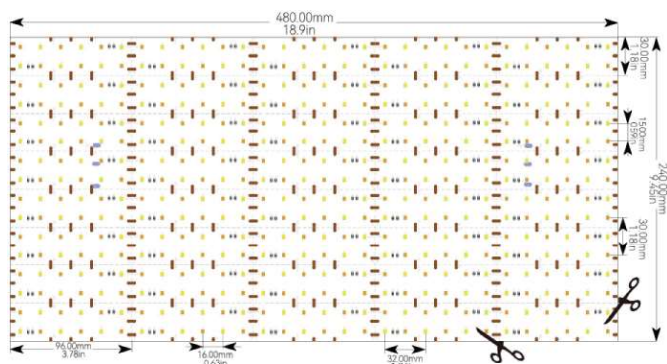

Cuttable Flex Mat, 648LEDs, DC12V



Part No.: GLU-P2L0300BI648-12V

LED Qty.: 648pcs(Tungsten/Daylight each 324 pcs)

Working Voltage: DC12V

Power: 100W(Max.)

Current: 8.33A(Max.)

Beam Angle: 120°

Dimension: 480×240mm(18.9×9.45 in.)

Mini Cuttable Size: 80×26.67mm(3.15×1.05in.)

Operating Temperature: -20° C to +50° C

IP Grade: IP20

Connector: Bare cable, Phoenix 3-Female, RXL Connector

Life Span: 50,000 Hrs

Certification: UL/CUL Listed(Pending), CE Compliant

12VDC CINEMA Hybrid, DC12V

CCT: 2000K-3200K(Tungsten)/5600K-10000K(Daylight)

Typic CCT: 2800K(Tungsten)/6500K(Daylight)

CRI: 95+(Tungsten)/95+(Daylight)


TLCI: 95+(Tungsten)/95+(Daylight)

TM-30 Data Whites: Rf>95, Rg>102, CQS>97(Tungsten/Daylight)

Lumens: 3840(Tungsten)/4200(Daylight)

Dimension


Cuttable Flex Mat, 648LEDs, DC12V

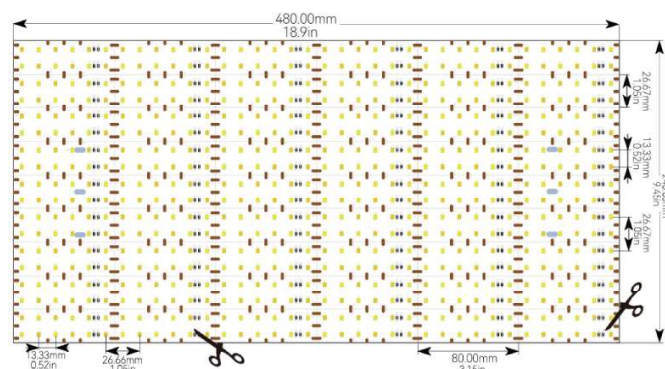

Cuttable Flex LED Mat/Panel CINEMA Hybrid Series

2835 Hybrid Series 格路光电 GLU Lighting

DC24V Cuttable Flex Mat, 648LEDs, DC24V

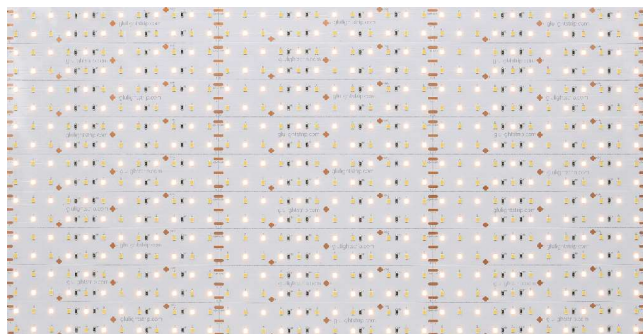

Part No.: GLU-P2L0300BI648-24V

LED Qty.: 648pcs(Tungsten/Daylight each 324 pcs)

Working Voltage: DC24V

Power: 100W(Max.)

Current: 4.16A(Max.)

Beam Angle: 120°

Dimension: 480×240mm(18.9×9.45 in.)

Mini Cuttable Size: 160×26.67mm(6.3×1.05in.)

Operating Temperature: -20° C to +50° C

IP Grade: IP20

Connector: Bare cable, Phoenix 3-Female, RXL Connector

Life Span: 50,000 Hrs

Certification: UL/CUL Listed, CE Compliant

24VDC CINEMA Hybrid, DC24V

CCT: 2000K-3200K(Tungsten)/5600K-10000K(Daylight)

Typic CCT: 2800K(Tungsten)/6500K(Daylight)

CRI: 95+(Tungsten)/95+(Daylight)


TLCI: 95+(Tungsten)/95+(Daylight)

TM-30 Data: Rf>95, Rg>102, CQS>97(Tungsten/Daylight)


Lumens: 3850(Tungsten)/4200(Daylight)

Dimension

Cuttable Flex Mat, 648LEDs, DC24V

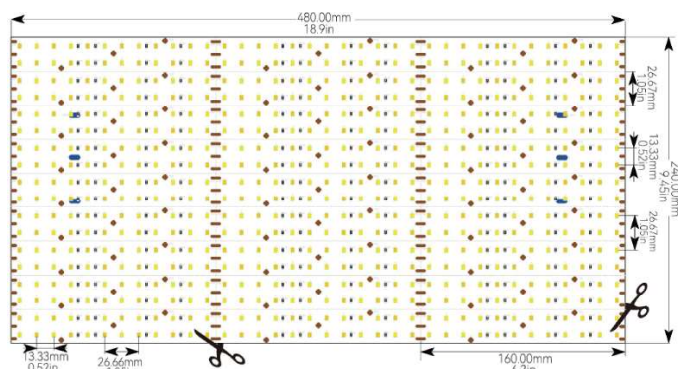

DC5V Single LED Cuttable Flex Mat, 600LEDs, DC5V

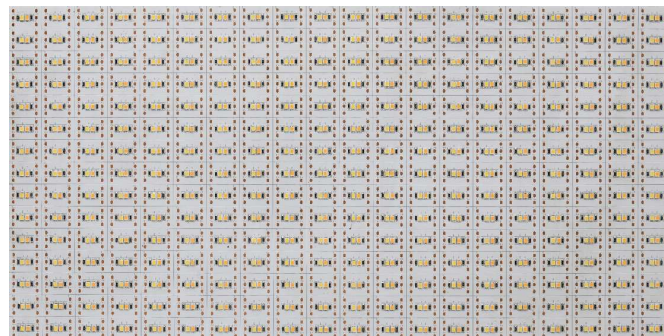

Part No.: GLU-P2L0300BI600-5V

LED Qty.: 600pcs(Tungsten/Daylight each 300 pcs)

Working Voltage: DC5V

Power: 100W(Max.)

Current: 20A(Max.)

Beam Angle: 120°

Dimension: 480×240mm(18.9×9.45 in.)

Mini Cuttable Size: 24×16mm(0.95×0.63in.)

Operating Temperature: -20° C to +50° C

IP Grade: IP20

Connector: Bare cable, Phoenix 3-Female, RXL Connector

Life Span: 50,000 Hrs

Certification: UL/CUL Listed(Pending), CE Compliant

5VDC CINEMA Hybrid, DC5V

CCT: 2000K-3200K(Tungsten)/5600K-10000K(Daylight)

Typic CCT: 2800K(Tungsten)/6500K(Daylight)

CRI: 95+(Tungsten)/95+(Daylight)


TLCI: 95+(Tungsten)/95+(Daylight)

TM-30 Data Whites: Rf>95, Rg>102, CQS>97(Tungsten/Daylight)

Lumens: 3000(Tungsten)/3500(Daylight)

Dimension

Single LED Cuttable Flex Mat, 600LEDs, DC5V

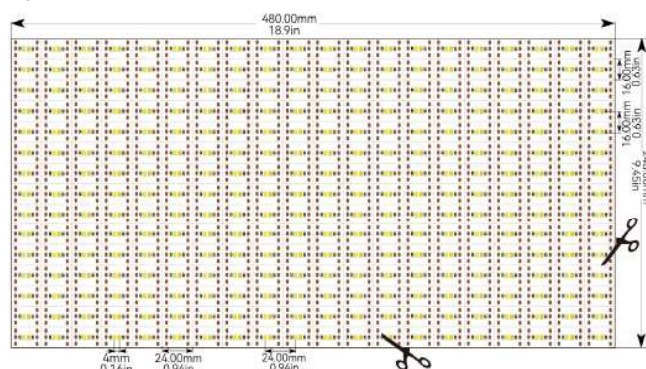


Cuttable Flex LED Mat/Panel CINEMA Hybrid Series

2835 Hybrid Series 格路光电 GLU Lighting



Single LED Cuttable Flex Mat, 600LEDs, DC12V

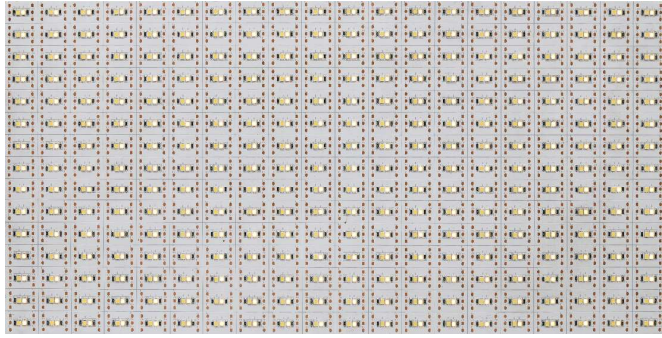

Part No.: GLU-P2L0300BI600-12V

LED Qty.: 648pcs(Tungsten/Daylight each 300 pcs)

Working Voltage: DC12V

Power: 100W(Max.)

Current: 8.33A(Max.)

Beam Angle: 120°

Dimension: 480×240mm(18.9×9.45 in.)

Mini Cuttable Size: 24×16mm(0.95×0.63in.)

Operating Temperature: -20° C to +50° C

IP Grade: IP20

Connector: Bare cable, Phoenix 3-Female, RXL Connector

Life Span: 50,000 Hrs

Certification: UL/CUL Listed(Pending), CE Compliant



12VDC CINEMA Hybrid, DC12V

CCT: 2000K-3200K(Tungsten)/5600K-10000K(Daylight)

Typic CCT: 2800K(Tungsten)/6500K(Daylight)

CRI: 95+(Tungsten)/95+(Daylight)


TLCI: 95+(Tungsten)/95+(Daylight)

TM-30 Data: Rf>95, Rg>102, CQS>97(Tungsten/Daylight)


Lumens: 3200(Tungsten)/3580(Daylight)

Dimension

Single LED Cuttable Flex Mat, 600LEDs, DC12V

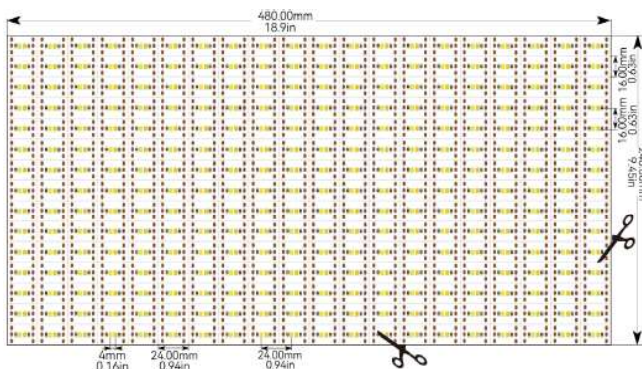

Single LED Cuttable Flex Mat, 600LEDs, DC24V

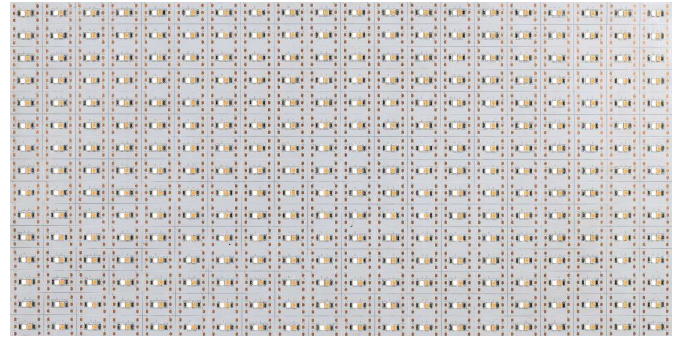

Part No.: GLU-P2L0300BI600-24V

LED Qty.: 600pcs(Tungsten/Daylight each 300 pcs)

Working Voltage: DC24V

Power: 100W(Max.)

Current: 4.16A(Max.)

Beam Angle: 120°

Dimension: 480×240mm(18.9×9.45 in.)

Mini Cuttable Size: 24×16mm(0.95×0.63in.)

Operating Temperature: -20° C to +50° C

IP Grade: IP20

Connector: Bare cable, Phoenix 3-Female, RXL Connector

Life Span: 50,000 Hrs

Certification: UL/CUL Listed, CE Compliant



24VDC CINEMA Hybrid, DC24V

CCT: 2000K-3200K(Tungsten)/5600K-10000K(Daylight)

Typic CCT: 2800K(Tungsten)/6500K(Daylight)

CRI: 95+(Tungsten)/95+(Daylight)


TLCI: 95+(Tungsten)/95+(Daylight)

TM-30 Data Whites: Rf>95, Rg>102, CQS>97(Tungsten/Daylight)

Lumens: 3400(Tungsten)/4000(Daylight)

Dimension

Single LED Cuttable Flex Mat, 600LEDs, DC24V

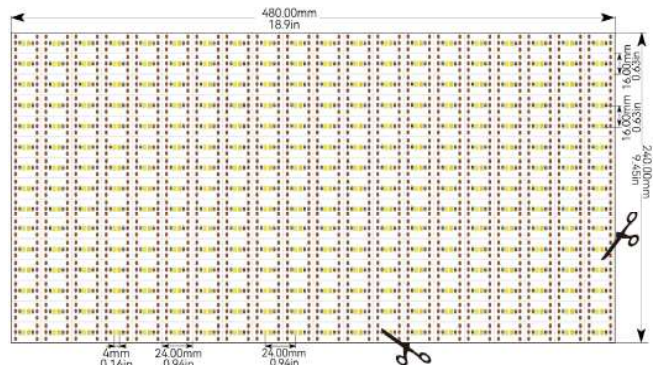


Non-cuttable Flex LED Mat/Panel CINEMA Hybrid Series

2835 Hybrid Series 格路光电 GLU Lighting



Non-cuttable Flex Mat, 882LEDs, DC12V

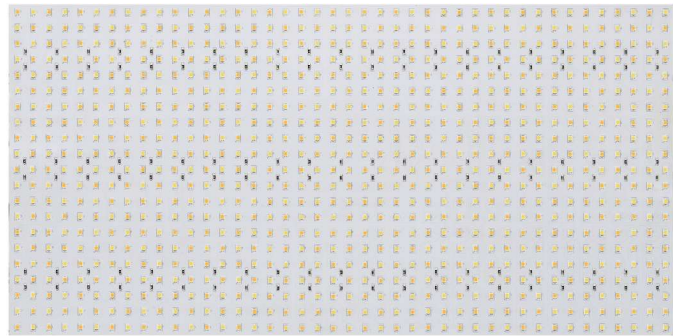

Part No.: GLU-P2L0300BI882-12V

LED Qty.: 882pcs(Tungsten/Daylight each 441 pcs)

Working Voltage: DC12V

Power: 100W(Max.)

Current: 8.33A(Max.)

Beam Angle: 120°

Dimension: 480×240mm(18.9×9.45 in.)

Operating Temperature: -20° C to +50° C

IP Grade: IP20

Connector: Bare cable, Phoenix 3-Female, RXL Connector

Life Span:50,000 Hrs

Certification: UL/CUL Listed(Pending), CE Compliant



CINEMA Hybrid, DC12V

CCT: 2000K-3200K(Tungsten)/5600K-10000K(Daylight)

Typic CCT: 2800K(Tungsten)/6500K(Daylight)

CRI: 95+(Tungsten)/95+(Daylight)

TLCI: 95+(Tungsten)/95+(Daylight)

TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)


Lumens: 4000(Tungsten)/4800(Daylight)

Dimension

Non-cuttable Flex Mat, 882LEDs, DC12V



Non-cuttable Flex Mat, 882LEDs, DC24V

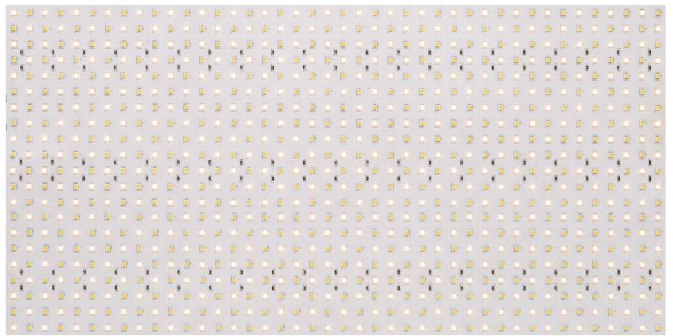

Part No.: GLU-P2L0300BI882-24V

LED Qty.: 882pcs(Tungsten/Daylight each 441 pcs)

Working Voltage: DC24V

Power: 100W(Max.)

Current: 4.16A(Max.)

Beam Angle: 120°

Dimension: 480×240mm(18.9×9.45 in.)

Operating Temperature: -20° C to +50° C

IP Grade: IP20

Connector: Bare cable, Phoenix 3-Female, RXL Connector

Life Span:50,000 Hrs

Certification: UL/CUL Listed, CE Compliant



CINEMA Hybrid, DC24V

CCT: 2000K-3200K(Tungsten)/5600K-10000K(Daylight)

Typic CCT: 2800K(Tungsten)/6500K(Daylight)

CRI Whites: 95+(Tungsten)/95+(Daylight)

TLCI Whites: 95+(Tungsten)/95+(Daylight)

TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)

Lumens: 4300(Tungsten)/5000(Daylight)

Dimension

Non-cuttable Flex Mat, 882LEDs, DC24V




Non-cuttable Flex LED Mat/Panel CINEMA Hybrid Series

2835 Hybrid Series 格路光电 GLU Lighting



Non-cuttable Flex Mat, 882LEDs, DC48V

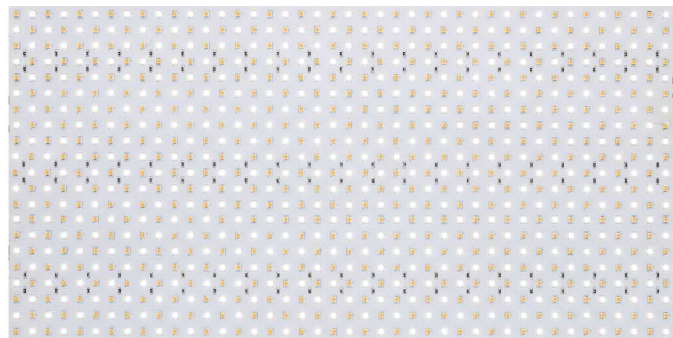

Part No.: GLU-P2L0300BI882-48V

LED Qty.: 882pcs(Tungsten/Daylight each 441 pcs)

Working Voltage: DC48V

Power: 100W(Max.)

Current: 2.08A(Max.)

Beam Angle: 120°

Dimension: 480×240mm(18.9×9.45 in.)

Operating Temperature: -20° C to +50° C

IP Grade: IP20

Connector: Bare cable, Phoenix 3-Female, RXL Connector

Life Span:50,000 Hrs

Certification: UL/CUL Listed(Pending), CE Compliant



CINEMA Hybrid, DC48V

CCT: 2000K-3200K(Tungsten)/5600K-10000K(Daylight)

Typic CCT: 2800K(Tungsten)/6500K(Daylight)

CRI: 95+(Tungsten)/95+(Daylight)


TLCI: 95+(Tungsten)/95+(Daylight)

TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)


Lumens: 4500(Tungsten)/5100(Daylight)

Dimension

Non-cuttable Flex Mat, 882LEDs, DC48V

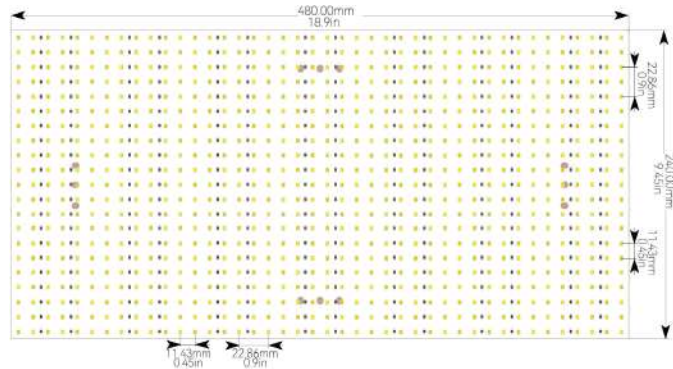

Non-cuttable Flex Mat, 1152LEDs, DC12V

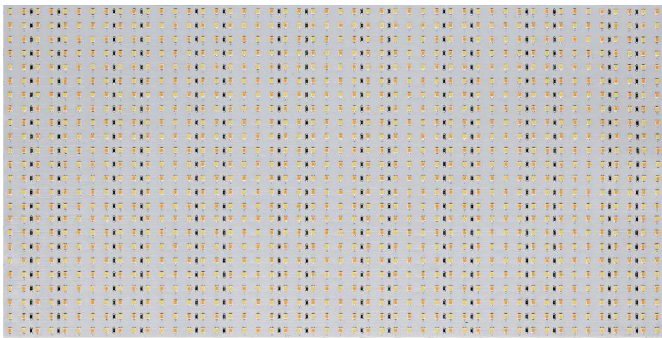

Part No.: GLU-P2L0300BI1152-12V

LED Qty.: 1152pcs(Tungsten/Daylight each 576pcs)

Working Voltage: DC12V

Power: 100W(Max.)

Current: 8.33A(Max.)

Beam Angle: 120°

Dimension: 480×240mm(18.9×9.45 in.)

Operating Temperature: -20° C to +50° C

IP Grade: IP20

Connector: Bare cable, Phoenix 3-Female, RXL Connector

Life Span:50,000 Hrs

Certification: UL/CUL Listed(Pending), CE Compliant



CINEMA Hybrid, DC12V

CCT: 2000K-3200K(Tungsten)/5600K-10000K(Daylight)

Typic CCT: 2800K(Tungsten)/6500K(Daylight)

CRI: 95+(Tungsten)/95+(Daylight)


TLCI: 95+(Tungsten)/95+(Daylight)

TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)

Lumens: 4000(Tungsten)/4500(Daylight)

Dimension


Non-cuttable Flex Mat, 1152LEDs, DC12V

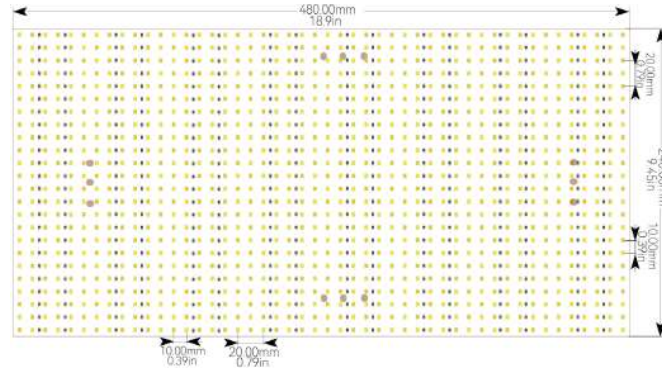

Non-cuttable Flex LED Mat/Panel CINEMA Hybrid Series

2835 Hybrid Series 格路光电 GLULighting

DC24V Non-cuttable Flex Mat, 1152LEDs, DC24V

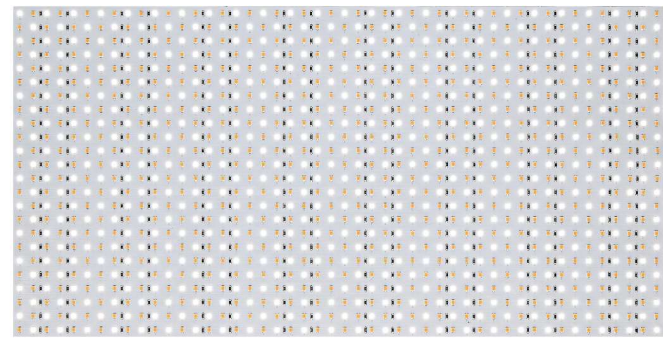


Part No.:	GLU-P2L0300BI1152-24V
LED Qty.:	1152pcs(Tungsten/Daylight each 576 pcs)
Working Voltage:	DC24V
Power:	100W(Max.)
Current:	4.16A(Max.)
Beam Angle:	120°
Dimension:	480×240mm(18.9×9.45 in.)
Operating Temperature:	-20° C to +50° C
IP Grade:	IP20
Connector:	Bare cable, Phoenix 3-Female, RXL Connector
Life Span:	50,000 Hrs
Certification:	UL/CUL Listed, CE Compliant

24VDC CINEMA Hybrid, DC24V


CCT:	2000K-3200K(Tungsten)/5600K-10000K(Daylight)
Typic CCT:	2800K(Tungsten)/6500K(Daylight)
CRI Whites:	95+(Tungsten)/95+(Daylight)
TLCI Whites:	95+(Tungsten)/95+(Daylight)
TM-30 Data Whites:	Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
Lumens:	4200(Tungsten)/4800(Daylight)

Dimension

Non-cuttable Flex Mat, 1152LEDs, DC24V

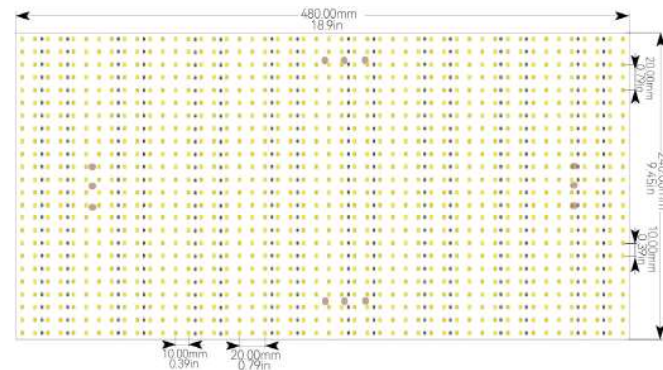

DC48V Non-cuttable Flex Mat, 1152LEDs, DC48V

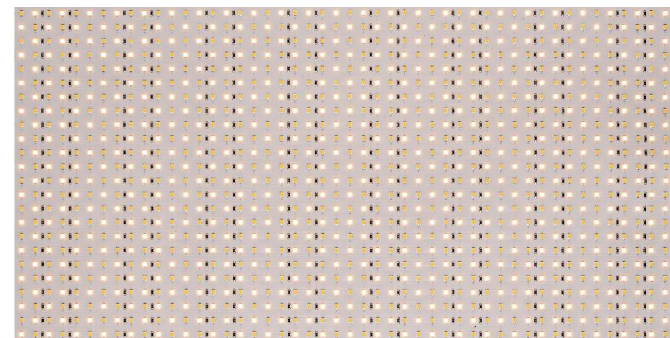


Part No.:	GLU-P2L0300BI1152-48V
LED Qty.:	1152pcs(Tungsten/Daylight each 576pcs)
Working Voltage:	DC48V
Power:	100W(Max.)
Current:	2.08A(Max.)
Beam Angle:	120°
Dimension:	480×240mm(18.9×9.45 in.)
Operating Temperature:	-20° C to +50° C
IP Grade:	IP20
Connector:	Bare cable, Phoenix 3-Female, RXL Connector
Life Span:	50,000 Hrs
Certification:	UL/CUL Listed(Pending), CE Compliant

48VDC CINEMA Hybrid, DC48V

CCT:	2000K-3200K(Tungsten)/5600K-10000K(Daylight)
Typic CCT:	2800K(Tungsten)/6500K(Daylight)
CRI:	95+(Tungsten)/95+(Daylight)
TLCI:	95+(Tungsten)/95+(Daylight)
TM-30 Data Whites:	Rf>95, Rg>102,CQS>97(Tungsten/Daylight)
Lumens:	4200(Tungsten)/4800(Daylight)

Dimension


Non-cuttable Flex Mat, 1152LEDs, DC48V

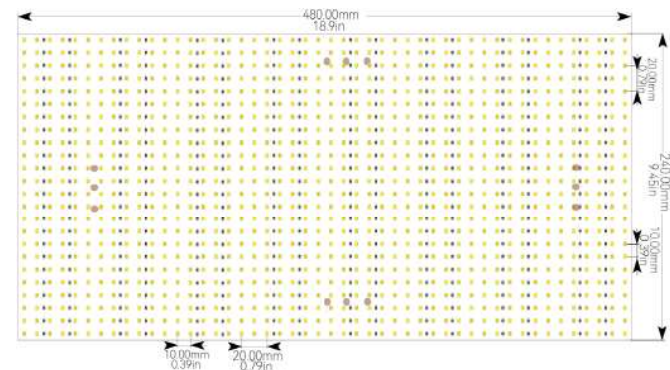

Non-cuttable Flex LED Mat/Panel CINEMA Hybrid Series

2835 Hybrid Series 格路光电 GLU Lighting

Non-cuttable Flex Mat, 1440LEDs, DC12V

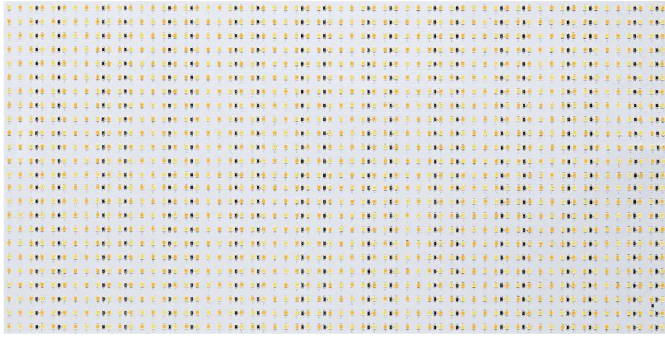

Part No.: GLU-P2L0300BI1440-12V

LED Qty.: 1440pcs(Tungsten/Daylight each 720pcs)

Working Voltage: DC12V

Power: 100W(Max.)

Current: 8.33A(Max.)

Beam Angle: 120°

Dimension: 480×240mm(18.9×9.45 in.)

Operating Temperature: -20° C to +50° C

IP Grade: IP20

Connector: Bare cable, Phoenix 3-Female, RXL Connector

Life Span:50,000 Hrs

Certification: UL/CUL Listed(Pending), CE Compliant

12VDC CINEMA Hybrid, DC12V

CCT: 2000K-3200K(Tungsten)/5600K-10000K(Daylight)

Typic CCT: 2800K(Tungsten)/6500K(Daylight)

CRI: 95+(Tungsten)/95+(Daylight)

TLCI: 95+(Tungsten)/95+(Daylight)

TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)


Lumens: 4000(Tungsten)/4500(Daylight)

Dimension

Non-cuttable Flex Mat, 1440LEDs, DC12V



Non-cuttable Flex Mat, 1440LEDs, DC24V

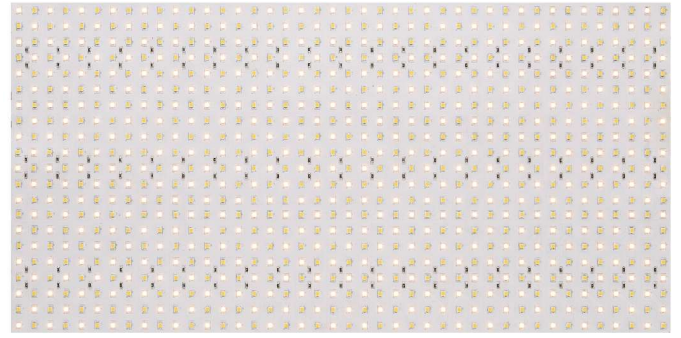

Part No.: GLU-P2L0300BI1440-24V

LED Qty.: 1440pcs(Tungsten/Daylight each 720pcs)

Working Voltage: DC24V

Power: 100W(Max.)

Current: 4.16A(Max.)

Beam Angle: 120°

Dimension: 480×240mm(18.9×9.45 in.)

Operating Temperature: -20° C to +50° C

IP Grade: IP20

Connector: Bare cable, Phoenix 3-Female, RXL Connector

Life Span:50,000 Hrs

Certification: UL/CUL Listed, CE Compliant

24VDC CINEMA Hybrid, DC24V

CCT: 2000K-3200K(Tungsten)/5600K-10000K(Daylight)

Typic CCT: 2800K(Tungsten)/6500K(Daylight)

CRI Whites: 95+(Tungsten)/95+(Daylight)

TLCI Whites: 95+(Tungsten)/95+(Daylight)

TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)

Lumens: 4200(Tungsten)/4600(Daylight)

Dimension

Non-cuttable Flex Mat, 1440LEDs, DC24V




Non-cuttable Flex LED Mat/Panel CINEMA Hybrid Series

2835 Hybrid Series 格路光电 GLU Lighting



Non-cuttable Flex Mat, 1440LEDs, DC48V

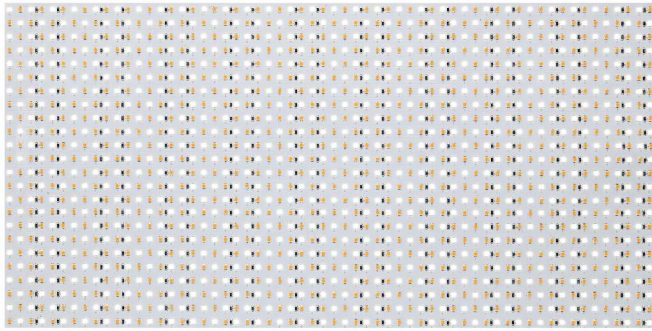

Part No.: GLU-P2L0300B11440-48V

LED Qty.: 1440pcs(Tungsten/Daylight each 720pcs)

Working Voltage: DC48V

Power: 100W(Max.)

Current: 2.08A(Max.)

Beam Angle: 120°

Dimension: 480×240mm(18.9×9.45 in.)

Operating Temperature: -20° C to +50° C

IP Grade: IP20

Connector: Bare cable, Phoenix 3-Female, RXL Connector

Life Span:50,000 Hrs

Certification: UL/CUL Listed(Pending), CE Compliant



CINEMA Hybrid, DC48V

CCT: 2000K-3200K(Tungsten)/5600K-10000K(Daylight)

Typic CCT: 2800K(Tungsten)/6500K(Daylight)

CRI: 95+(Tungsten)/95+(Daylight)

TLCI: 95+(Tungsten)/95+(Daylight)

TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)


Lumens: 4200(Tungsten)/4600(Daylight)

Dimension

Non-cuttable Flex Mat, 1440LEDs, DC48V



Non-cuttable Flex Mat, 1568LEDs, DC48V

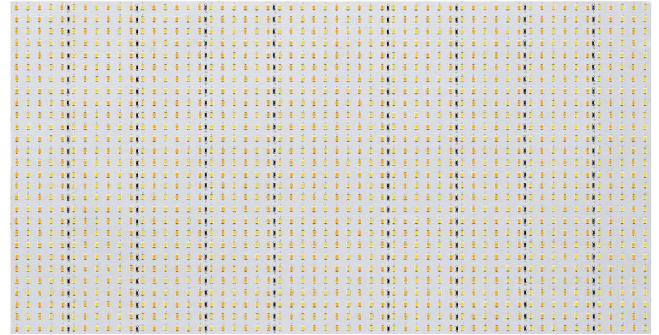

Part No.: GLU-P2L0300B11568-48V

LED Qty.: 1568pcs(Tungsten/Daylight each 784pcs)

Working Voltage: DC48V

Power: 100W(Max.)

Current: 2.08A(Max.)

Beam Angle: 120°

Dimension: 480×240mm(18.9×9.45 in.)

Operating Temperature: -20° C to +50° C

IP Grade: IP20

Connector: Bare cable, Phoenix 3-Female, RXL Connector

Life Span:50,000 Hrs

Certification: UL/CUL Listed(Pending), CE Compliant



CINEMA Hybrid, DC48V

CCT: 2000K-3200K(Tungsten)/5600K-10000K(Daylight)

Typic CCT: 2800K(Tungsten)/6500K(Daylight)

CRI: 95+(Tungsten)/95+(Daylight)

TLCI: 95+(Tungsten)/95+(Daylight)

TM-30 Data Whites: Rf>95, Rg>102,CQS>97(Tungsten/Daylight)

Lumens: 4600(Tungsten)/5200(Daylight)

Dimension

Non-cuttable Flex Mat, 1568LEDs, DC48V

